



BE-SP Series

Vertical-Lok Spacers — Intermediate & Base

Spec Sheet | Belle Electric Part Numbers | All dimensions in inches




Base Vertical-Lok Spacers

Intermediate Vertical-Lok Spacers

VERTICAL-LOK SPACERS

Base

Vertical-Lok Spacers

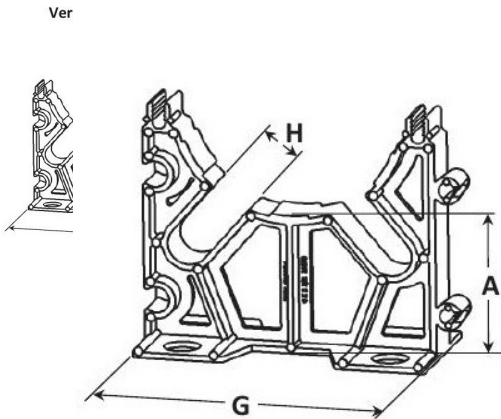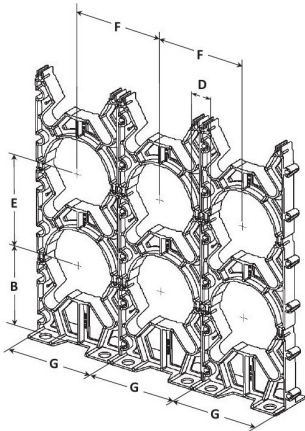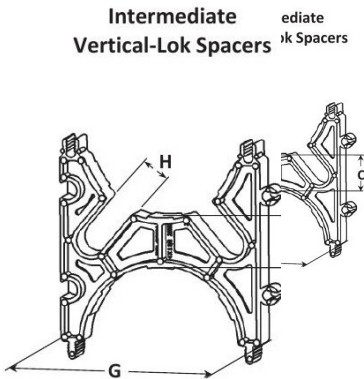

INTERMEDIATE VERTICAL-LOK SPACERS — Dimensions (IN)						
SIZE (IN)	C	D	E	F	G	H
2 x 1 1/2	1.52	1.50	3.95	3.95	3.94	0.63
2 x 2	2.03	2.06	4.48	4.48	4.47	0.63
2 x 3	3.00	3.03	5.45	5.45	5.44	0.63
3 x 1 1/2	1.50	1.45	5.15	5.12	5.12	*
3 x 2	2.00	1.88	5.64	5.63	5.63	0.88
3 x 3	3.00	2.88	6.66	6.63	6.63	0.88
4 x 1	1.00	1.03	5.66	5.63	5.63	*
4 x 1 1/2	1.50	1.39	6.13	6.14	6.13	0.88
4 x 2	2.00	1.88	6.64	6.63	6.63	0.88
4 x 3	3.00	2.90	7.64	7.64	7.63	0.88
5 x 1 1/2	1.68	1.69	7.37	7.37	7.37	*
5 x 2	2.25	2.15	7.89	7.89	7.88	0.88
5 x 3	3.06	2.96	8.70	8.70	8.69	0.88
6 x 1 1/2	1.50	1.38	8.24	8.22	8.21	0.88
6 x 2	2.00	1.89	8.74	8.73	8.72	0.88
6 x 3	3.00	2.90	9.77	9.77	9.75	0.88
8 x 2	—	—	—	—	—	*

BASE VERTICAL-LOK SPACERS — Dimensions (IN)			
SIZE (IN)	A	B	H
2 x 1 1/2	3.04	4.25	0.63
2 x 2	3.04	4.25	0.63
2 x 3	3.04	4.25	0.63
3 x 1 1/2	3.00	5.84	*
3 x 2	2.97	4.78	0.88
3 x 3	3.00	4.81	0.88
4 x 1	1.76	4.05	*
4 x 1 1/2	3.00	5.31	0.88
4 x 2	3.06	5.38	0.88
4 x 3	3.06	5.38	0.88
5 x 1 1/2	3.00	5.84	*
5 x 2	3.13	5.94	0.88
5 x 3	3.19	6.00	0.88
6 x 1 1/2	3.02	6.38	0.88
6 x 2	3.02	6.38	0.88
6 x 3	3.00	6.38	0.88
8 x 2	—	—	*

* Do not have rebar slots or base holes

All dimensions in inches. All information current at time of publication. Belle Electric reserves the right to update product information without notice. | Spec Sheet Rev. 2025